

CAULKED CONSTRUCTION JOINT  
IN CONCRETE BASE WITH 1/2"  
EXPANSION JOINT MATERIAL  
AND LONGITUDINAL JOINT TIES  
PLACED 2' ON CENTER

CONCRETE STREET  
PAVER CROSSWALK  
AREA

TYPICAL WEEP  
HOLE LOCATION


PREMOULDED  
JOINT MATERIAL  
AGAINST CURB

TYPICAL  
UNDERDRAIN  
LAYOUT

CONCRETE  
COLLAR

12" WIDE WHITE  
OVERLAID PAVEMENT  
STRIPE EACH SIDE

**PLAN**

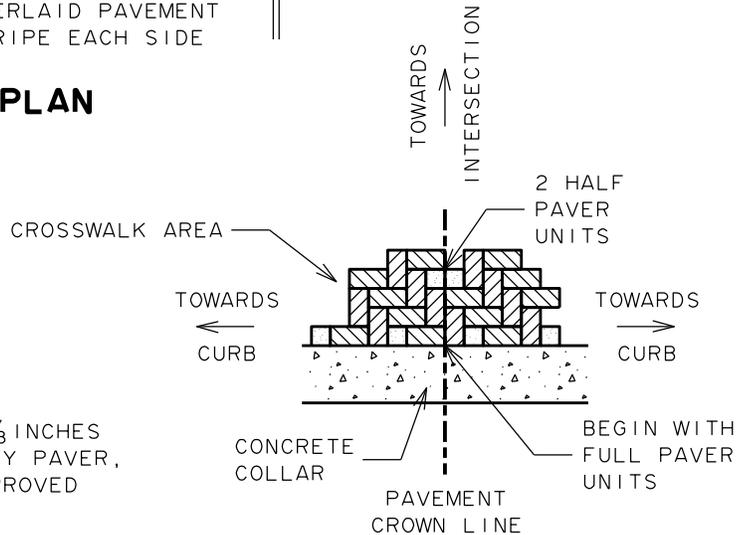

**DETAIL A**

**NOTES:**

1. CONCRETE STREET PAVER TO BE 4 x 8 x 3 1/8 INCHES PRECAST UNILOCK HOLLANDSTONE HEAVY-DUTY PAVER, WAUSAU TERRA-LOK HOLLAND PAVER, OR APPROVED EQUIVALENT. COLOR TO BE TERRA COTTA.
2. CONCRETE STREET PAVER TO BE SET IN HERRINGBONE PATTERN. COMMENCE BY PLACING FULL UN CUT CONCRETE STREET PAVER UNIT TIGHTLY AGAINST OUTER EDGE OF CROSSWALK AREA AND IMMEDIATELY ADJACENT TO CROWN LINE OF PAVEMENT, WORKING INWARD TOWARDS INTERSECTION AND OUTWARD TOWARDS CURB LINE.
3. INNER WIDTH OF CROSSWALK AREA CAN BE ADJUSTED BY UP TO MAXIMUM OF 2 INCHES TO ACCOMMODATE LAYING OF FULL SIZE CONCRETE STREET PAVER UNITS TO MINIMIZE GAP ALONG INNER EDGE OF CONCRETE COLLAR.
4. FILL ANY GAP BETWEEN OUTER EDGE OF CONCRETE STREET PAVERS AND INNER EDGE OF CROSSWALK AREA WITH HARDWOOD SHIMS.
5. FILL JOINTS WITH UNILOCK POLYMERIC JOINTING SAND OR APPROVED EQUIVALENT.
6. WEEP HOLES ARE TO BE EVENLY SPACED BETWEEN 3 AND 4 FEET ON CENTER. PROVIDE 4 WEEP HOLES ALONG CURB LINE.
7. SEE DETAIL S506-4.

CITY OF ROCHESTER

**CONCRETE STREET  
PAVER CROSSWALK**

ISSUED 2-13-06

NON-STANDARD

REVISED 7-31-12

DWG.NO.S506-3