

Neighborhood and Business Development City Hall Room 121B, 30 Church Street Rochester, New York 14614-1290 www.cityofrochester.gov The Bureau of Buildings & Compliance

(Apr 2023)

SELF-SERVE PERMITTING INSTRUCTIONS PORCH REPAIR, NEW PORCH OR PORCH ENCLOSURE

HELPFUL INFORMATION:

- Enclosure (other than insect screening) of an open front porch visible from the Right of Way (street or sidewalk) is not permitted under the Zoning Code.
- Exterior work that is: located in a Preservation District, a Landmark or a designated Building of Historic Value, requires additional Zoning review. Call the Zoning Office at (585) 428-7043 to check the status of your building.
- ➤ We have included samples of the necessary plans you must submit in order for us to review your porch permit.

MINIMUM SUBMISSION REQUIREMENTS:

- ✓ Completed permit application (attached)
- ✓ Photographs of existing conditions if just repairing.
- ✓ Construction drawings, structural framing plans, footings, guard rails, steps, railings
- ✓ Insurance Certificates (information sheet attached)

HOW TO SUBMIT: Your completed permit application package and fee (checks or money orders made payable to "City Treasurer") can be submitted by:

- Email: planreview@cityofrochester.gov
- In person Monday, Wednesday, Friday 9am to 4pm
- Closed to walk- ins Tuesdays and Thursdays
- Drop box provided at City Hall A Building lobby
- Mail: The Bureau of Buildings & Compliance 30 Church Street, Room 121B Rochester, NY 14614

If you have any questions, please call 428-6526 for additional instructions. **Incomplete applications will be returned.** Thank you.

Phone: 585.428.6526 EMAIL: planreview@cityofrochester.gov EEO/ADA

Neighborhood and Business Development City Hall Room 121B, 30 Church Street Rochester, New York 14614-1290 www.cityofrochester.gov The Bureau of Buildings & Compliance

BUILDING PERMIT APPLICATION and ZONING COMPLIANCE REQUEST

PROPERTY ADDRESS:				
USE: RESIDENTIAL (1 or 2 Family) COMMERC	CIAL MIXED USE			
APPLICANT INFORMATION:				
OUR NAME: YOUR PHONE NUMBER:OUR EMAIL ADDRESS:				
YOUR MAILING ADDRESS:				
PROPERTY OWNER: [] Check if same as applicant above Name:	CONTRACTOR: (check if same as:) [] Owner [] Applicant (check both if applicable) Name:			
Address: (Cannot be a PO Box) (include City or Town)	Address:(Cannot be a PO Box) (include City or Town)			
Zip: Phone:	Zip: Phone:			
Email:	Email:			
ARCHITECT:OR ENGINEER				
PERMIT REQUEST:				
DESCRIPTION:				
ADDITION/NEW CONSTRUCTION INTERIOR	RENOVATIONS EXTERIOR RENOVATIONS			
CHANGE/ESTABLISH USE DECK P	OOL/HOT TUB SHED/GARAGE/CARPORT			
HVAC/MECHANICAL/ELECTRICAL SYSTEMS	OTHER:			
PROJECT COST ESTIMATE: (excluding plumbing & electrical) \$				
YOUR SIGNATURE:	DATE:			

Porch Permits

Drawings/Framing plans

Constructing A Porch

(without pre-made parts)

- 1. Construction drawing: should include the following and be drawn to scale (1/4" per foot preferred) Plan view (overhead), Elevations of all sides and Cross section/vertical slice (side view) with dimensions and notes of all materials:
 - a. Include title block with project location (address) & contact phone # on plan
 - b. Footer / Foundation / Pier details & dimensions
 - c. Floor joist framing size & on center spacing
 - d. Post and Beam size and spans
 - e. Header size and spans between posts supports for roof
 - f. Rafters & ceiling size & on center spacing
 - g. Width, length & roof pitch and connection with house
 - h. Fasteners & attachments label and types (hangers, bolts, lateral & hold down ties)
 - i. Steps to grade location and dimensions of tread & risers and handrails
 - j. Guardrails locations, dimensions (height & openings between balusters)

Porch Code Requirements:


Building Permit – for new or replacement porch - two sets of building plans are required as part
of the building permit application

HAPTER 3 (RCNYS RESIDENTIAL (ONE OR TWO FAMILY DWELLINGS) STAIR, HANDRAIL & GUARDRAIL DETAILS

lew or existing int required Guardrail

Open quardrails and open handrails on decks and stairways more than 30 licches above grade or floor below shall have members spaced so that a 4 inch diameter sphere cannot pass through.

than 4 3/8 inches. Openings in required guardraits along stairs shall be no greater

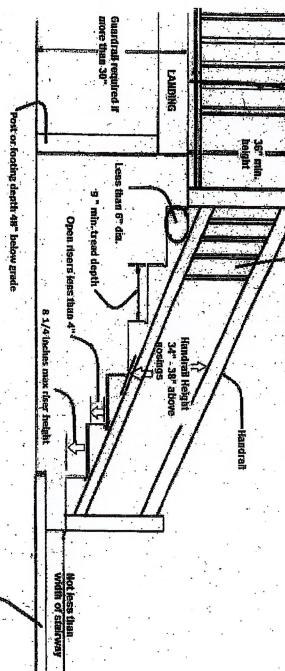

ir notes:


1. Stairways shall be no less than 36" wide.

Landing/Level Surface

Finished Grade

- 2. Stair risers shall be maximum 8 1/4 Inches in height.
- 3. Stair tread depth shall be a minimum of 9 inches.
- Dimensional variation between riser heights and or tread depths shall not exceed 3/8 inch variation.
- 5. Handralls are only required on stairs four or more risers.
- 6. Open risers are permitted on stairs with less than 30 inches of rise.
- 7. Stair tread nosing shall be 3/4 inch minimum and 1 1/4 inch maximum.
- 8. Handralis are required on at least one side and shall be continuous for the entire run of stairs.
- The handrall shall terminate at both ends into a wall or post.
- 9. Handrali grip size shall be 1.1/4" to 2" or shall meet graspability standards.
- 19. Handralls shall extend from a point directly above the top riser to a point directly above the bottom riser.
- 11. Carriage botts are NOT PERVITTED, use hex head bofts with washers and bex nuts (through boiting).
- 12. Minimum headroom of 6' 8"
- 13. Light required in vicinity of each landing

BUILDING CODE REQUIREMENTS FOR STAIR, HANDRAIL AND GUARDS (MULTI-FAMILY DWELLINGS, MIXED USE, COMMERCIAL & INDUSTRIAL) - CHAPTER 10 (BCNYS)

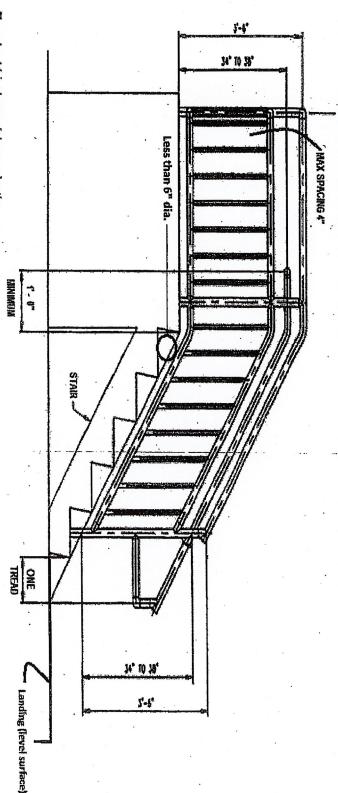

Treads: 11 inches minimum depth

Risers: 7 inches maximum height & 4 inches minimum for R-2 occupancies (see exception below).

30 degrees. *Risers shall be solid and vertical or sloped from the underside of the leading edge of the tread above at an angle of not more than

*Solid risers not required in stairs that are not part of an accessible means of egress, 4 inch sphere cannot pass through open riser.
*Nosings shall be no greater than 1.25 inches.

Dimensional uniformity: The tolerance between the largest and the smallest dimensions of tread and risers shall be no greater than 3/8 inch shall be 10 inches minimum. ***Exceptions. Within a dwelling unit of an R-2 occupancy or accessory to a single dwelling unit, riser height can be 7.75 inches maximum and tread depth

Handrail: 34" - 38" measured from nosing to top of handrail

*Required on both sides of stairways

*Shall be graspable and continuous for entire length of stairway (1.25 to 2 inch round if not circular, a perimeter dimension of at least 4

Inches and not greater than 6.25 inches)

*12 inch extensions are required at both top and bottom. The extensions shall return to the wall, guard or walking surface Suards: 42 inches minimum height for all walking surfaces and stairs & ramps located more than 30 inches above floor grade.

*Openings in guards along walking surfaces shall be no more than 4 inches

*Openings in guards along stairways shall be no more than 4 3/8 inches

*Opening limitation above 34 inch is 8 inch diameter

andings: Stairs and ramps shall have landings at both the top and bottom ***Exceptions for 21 inch sphere for group L3, F, H and S occupancies & access to electric, mechanical and plumbing equipment

*The landing depth shall be equal to the stair width, but need not to exceed 48 inches for straight run stairways

WORKERS' COMPENSATION INSURANCE

The State of New York requires that, prior to issuing any permits, the City of Rochester be provided with proof of Workers' Compensation Insurance coverage **or** provide proof of exemption from such coverage.

One of the following certificates must be provided by the applicant with each permit request:

- C105.2 or U-26.2 Workers' Compensation Insurance (private carrier) (contractor with employees)
- CE-200 Exemption Certificate (contractor with no employees)
- BP-1 Affidavit of Exemption
 (owner occupied 1-4 family & owner is performing work)
- SI12 or GSI-105.2 Self Insurance coverage

Helpful Hints:

- To obtain a CE 200 Exemption
 - https://www.businessexpress.ny.gov/
 - ➤ Worker's Compensation Board location at 130 W. Main Street (verify if open by calling 1-877-632-4996)
- Certificates for building permits are job-specific and a separate certificate will be required for each building permit.
- NYS does NOT accept "ACORD" Certificates nor will they accept faxed copies.

CITY OF ROCHESTER BUILDING PERMIT FEES

AS OF JULY 1ST, 2018

PROJEC	COST	FEE	PROJECT	COST	FEE
\$0	\$ 2,000	\$50	\$30,000	\$32,000	\$350
2,001	4,000	70	32,001	34,000	370
4,001	6,000	90	34,001	36,000	390
6,001	8,000	110	36,001	38,000	410
8,001	10,000	130	38,001	40,000	430
10,001	12,000	150	40,001	42,000	450
12,001	14,000	170	42,001	44,000	470
14,001	16,000	190	44,001	46,000	490
16,001	18,000	210	46,001	48,000	510
18,001	20,000	230	48,001	50,000	530
20,001	22,000	250	50,001	52,000	550
22,001	24,000	270	52,001	54,000	570
24,001	26,000	290	54,001	56,000	590
26,001	28,000	310	56,001	58,000	610
28,001	30,000	330	58,001	60,000	630

FORMULAS		
\$ 60,000 to 100,000	.009 x Cost + 150 = Fee	
\$ 100,001 to 500,000	.007 x Cost + 375 = Fee	
\$ 500,001 to 1,000,000	.005 x Cost + 1,475 = Fee	
\$ 1,000,001 and over	.003 x Cost + 3,675 = Fee	