


12" OVERLAID WHITE
PLASTIC PREFORMED
PERMANENT PAVEMENT
MARKING SYMBOL

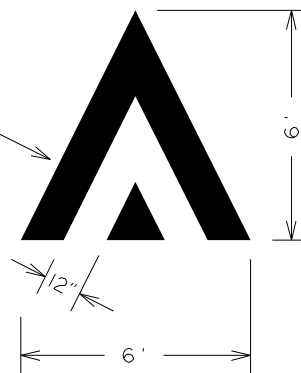

ARROW

NOTES:

1. TOP OF MAIN RAISED CROSSWALK AREA IS TO BE 3 INCHES ABOVE AND PARALLEL WITH THEORETICAL FINISHED GRADE AND CROSS-SLOPE. TOP OF APPROACH RAMP ARE TO BE PARABOLIC.
2. MAINTAIN THEORETICAL CURB AND PAVEMENT GRADES, AND PAVEMENT CROSS-SLOPE THRU RAISED CROSSWALK.
3. WIDTH, COLOR AND PATTERN OF MAIN RAISED CROSSWALK AREA WILL BE AS SPECIFIED IN CONTRACT DOCUMENTS.
4. CATCH BASINS ARE TO BE LOCATED ON UPHILL SIDE(S) OF TABLED INTERSECTION.
5. TEMPORARY WARNING SIGNS ARE TO BE INSTALLED MINIMUM OF 10 DAYS PRIOR TO COMMENCING CONSTRUCTION OF TABLED INTERSECTION.

CITY OF ROCHESTER

RAISED CROSSWALK

ISSUED	8-2-05	NON-STANDARD DWG.NO.S414-1
REVISED	3-1-17	