


### STANDARD TYPE S


TYPE S TO BE USED AT  
STOP CONTROLLED  
INTERSECTIONS ONLY

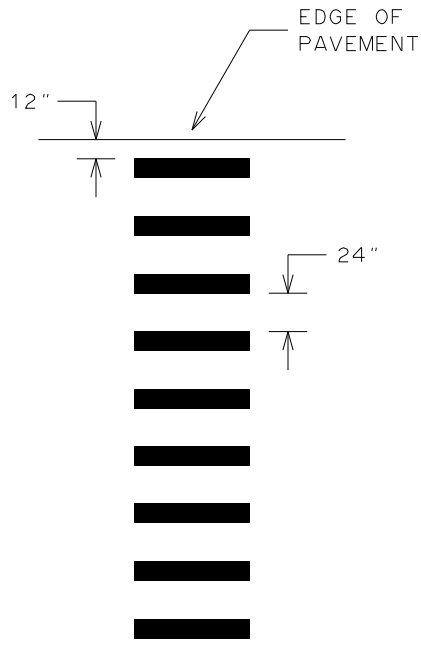

### LADDER BAR TYPE L

TYPE L TO BE USED AT  
SIGNAL CONTROLLED  
INTERSECTIONS THAT  
DO NOT HAVE HIGH  
PEDESTRIAN MOVEMENT

WHERE REQUIRED USE  
MCDOT CONTINENTAL STYLE  
CROSSWALK MARKINGS  
IN PLACE OF TYPE L

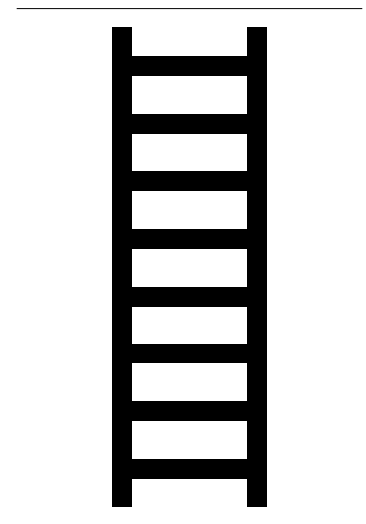

### COMBINED TYPE LS

TYPE LS TO BE USED AT  
MID-BLOCK CROSSWALKS  
AND SIGNAL CONTROLLED  
INTERSECTIONS THAT HAVE  
HIGH PEDESTRIAN MOVEMENT

#### NOTES :

1. PAVEMENT MARKINGS TO BE 12 INCH WIDE WHITE INLAID PAVEMENT MARKINGS.
2. DECORATIVE CROSSWALK TO HAVE MINIMUM 4 FEET WIDE REDUCED VIBRATION CLEAR ZONE CENTERED WITHIN CROSSWALK.
3. REFER TO MONROECOUNTY.GOV FOR DETAIL OF MCDOT CONTINENTAL STYLE CROSSWALK MARKINGS.

CITY OF ROCHESTER

## TYPICAL CROSSWALK MARKINGS

ISSUED	2-1-18	NON-STANDARD
REVISED		DWG.NO.S686-I