



ACCESS RAMP TYPE B ISOMETRIC

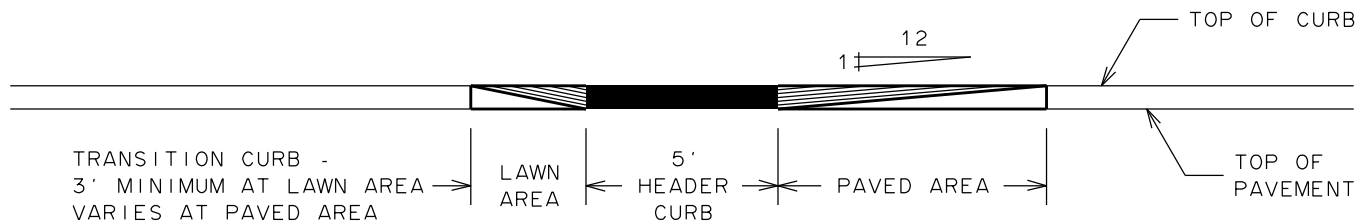

VIEW A-A

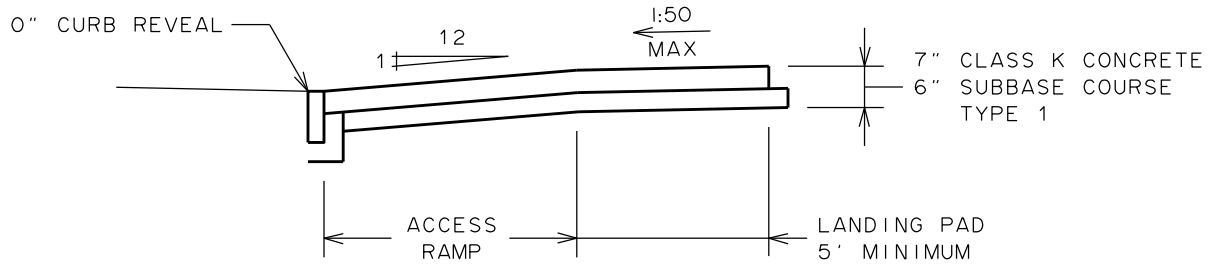

SECTION B-B

NOTES:

1. 1:12 IS MAXIMUM SLOPE OF ACCESS RAMP AND SIDE FLARE IN PAVED AREA.
2. SURFACE OF ACCESS RAMP IS TO BE STABLE, FIRM AND SLIP-RESISTANT. TEXTURE SURFACE WITH COARSE BROOM RUNNING TRANSVERSE TO SLOPE OF ACCESS RAMP.
3. ENTIRE AREA OF ACCESS RAMP AND LANDING PAD IS TO BE 7 INCH THICK CONCRETE.
4. SEE DETAIL S608-28 FOR DETECTABLE WARNING SYSTEM.

CITY OF ROCHESTER		
SIDEWALK ACCESS RAMP TYPE B		
ISSUED	9-2-91	STANDARD DWG.NO.R608-2
REVISED	5-1-13	