


PLAN

12" WHITE OVERLAID PLASTIC PAVEMENT MARKINGS (TOTAL OF 15 LINEAR FEET OF 12" WIDE PAVEMENT MARKINGS REQUIRED FOR EACH ARROW LOCATION)

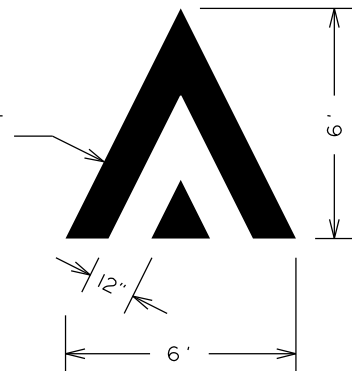

ARROW DETAIL

NOTES:

1. FINISHED SURFACE OF RAISED CROSSWALK AREA WILL BE 3 INCHES ABOVE FINISHED PAVEMENT SURFACE.
2. COLOR, PATTERN AND WIDTH OF RAISED CROSSWALK AREA WILL BE AS SPECIFIED IN CONTRACT DOCUMENTS.
3. MAINTAIN THEORETICAL CURB AND PAVEMENT GRADES, AND PAVEMENT CROSS-SLOPE THRU RAISED CROSSWALK AREA.
4. CATCH BASINS ARE TO BE LOCATED ON UPHILL SIDE(S) OF RAISED CROSSWALK AREA.
5. TEMPORARY WARNING SIGNS TO BE INSTALLED MINIMUM OF 10 DAYS PRIOR TO COMMENCING CONSTRUCTION OF RAISED CROSSWALK.

CITY OF ROCHESTER		
RAISED CROSSWALK		
ISSUED	8-2-05	NON-STANDARD DWG.NO.S414-I
REVISED	12-1-15	