
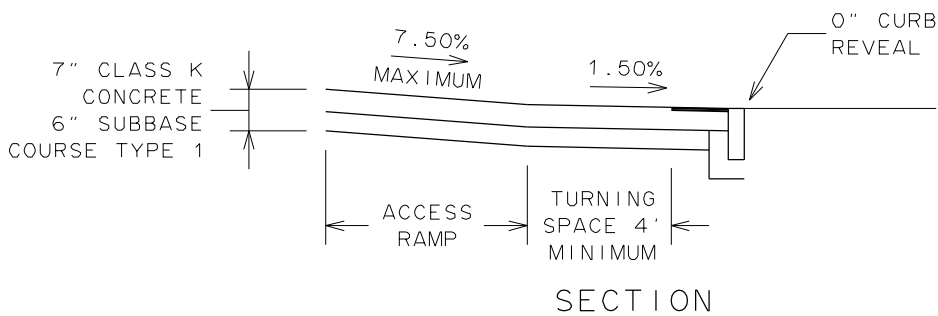


ACCESS RAMP TYPE G

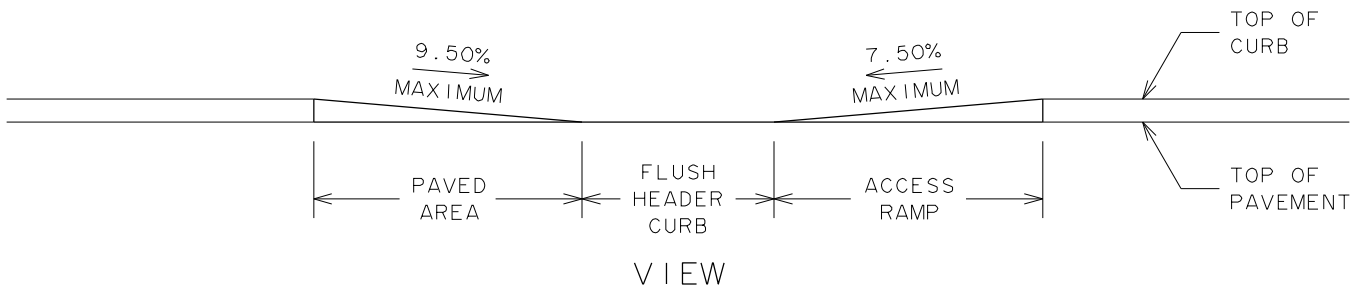

NOTES:

1. MINIMUM WIDTH OF ACCESS RAMPS AND TURNING SPACE IS 4 FEET.
2. SURFACE OF ACCESS RAMP TO BE FIRM, STABLE AND SLIP-RESISTANT. TEXTURE SURFACE WITH COARSE BROOM RUNNING TRANSVERSE TO SLOPE OF ACCESS RAMP.
3. ENTIRE AREA OF ACCESS RAMPS, TURNING SPACE AND SIDE FLARE TO BE 7 INCH THICK CONCRETE.

CITY OF ROCHESTER		
SIDEWALK ACCESS RAMP TYPE G		
ISSUED	3-21-94	NON-STANDARD DWG.NO.S608-15
REVISED	7-1-17	