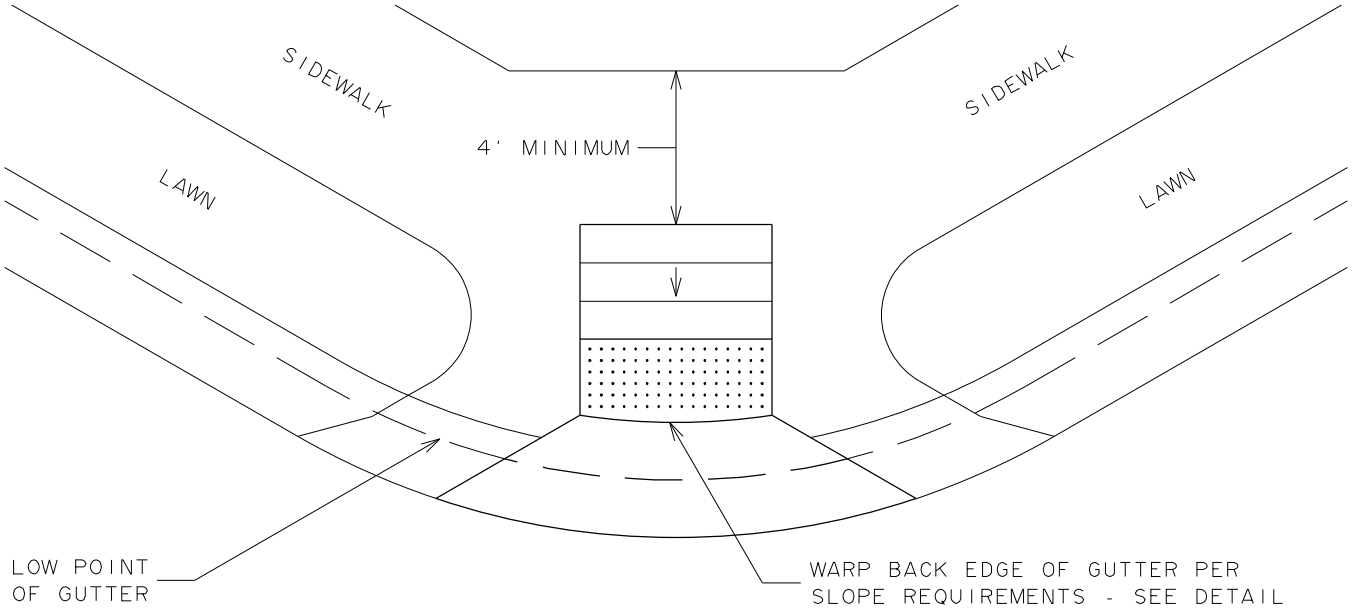

ACCESS RAMP TYPE H

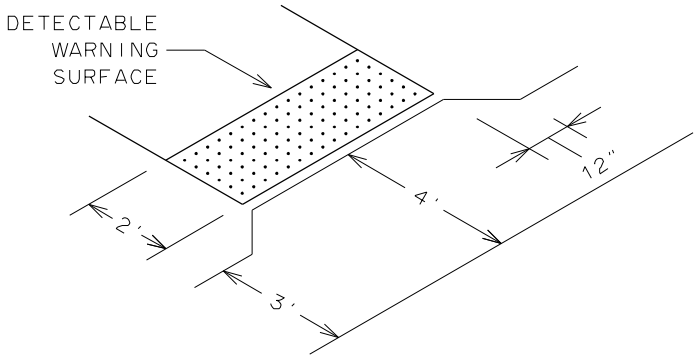

DETAIL

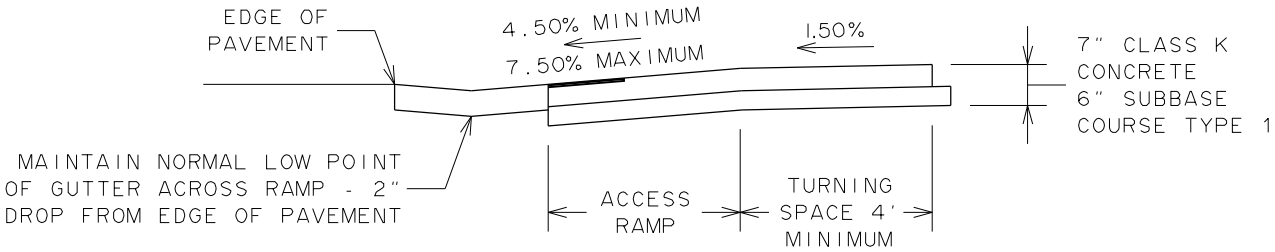

SECTION

NOTES:

1. MINIMUM WIDTH OF ACCESS RAMP IS 4 FEET.
2. RUNNING SLOPE OF SIDE FLARES TO BE 9.50% MAXIMUM.
3. SURFACE OF ACCESS RAMP TO BE FIRM, STABLE AND SLIP-RESISTANT. TEXTURE SURFACE WITH COARSE BROOM RUNNING TRANSVERSE TO SLOPE OF ACCESS RAMP.
4. ENTIRE AREA OF ACCESS RAMP AND LANDING PAD IS TO BE 7 INCH THICK CONCRETE.

CITY OF ROCHESTER

SIDEWALK
ACCESS RAMP
TYPE H

ISSUED	3-21-94	NON-STANDARD
REVISED	7-1-17	DWG.NO.S608-16