




DOME SECTION

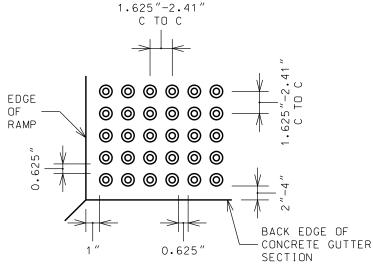

DOME SPACING

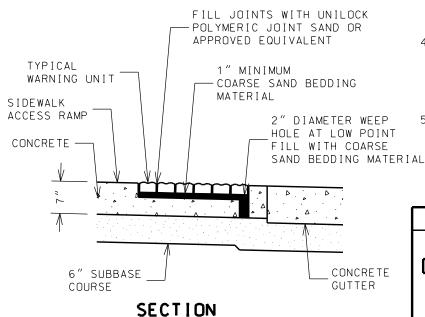

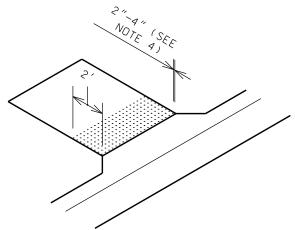

ISOMETRIC

NOTES:

- 1. QUANTITY OF TRUNCATED DOMES SHOWN IS FOR ILLUSTRATIVE PURPOSES ONLY, TO DEPICT REQUIRED SQUARE GRID PATTERN.
- 2. TRUNCATED DOMES ARE TO BE ALIGNED IN SQUARE GRID PATTERN IN PREDOMINANT DIRECTION OF TRAVEL.
- 3. DETECTABLE WARNING SYSTEM FIELD IS TO BE 2 FEET DEEP, AND IS TO EXTEND ACROSS FULL WIDTH OF SIDEWALK ACCESS RAMP, BUT NOT UP SIDE FLARES.
- 4. DETECTABLE WARNING SYSTEM FIELD IS TO BE LOCATED SUCH THAT OUTER EDGE OF WARNING FIELD NEAREST TO STREET IS 2 TO 4 INCHES OFF BACK EDGE OF CONCRETE GUTTER.
- 5. ENTIRE DETECTABLE WARNING SYSTEM FIELD INCLUDING TRUNCATED DOMES. IS TO BE DARK GRAY IN COLOR. PER L MUNSELL BOOK NOTATION 10BG 3/1. FEDERAL STANDARD 595B NUMBER 36081, OR APPROVED EQUIVALENT.

CITY OF ROCHESTER

PRECAST BRICK
DETECTABLE WARNING
SYSTEM AT
CONCRETE GUTTER

ISSUED 1-23-03 NON-STANDARD REVISED 5-25-10 DWG.NO.S608-29