


## DETAIL

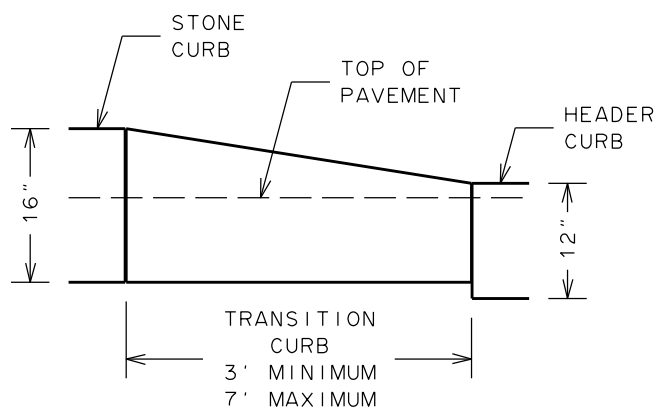

## TRANSITION CURB

1. CURB THICKNESS IS TO BE 5 INCHES, OR AS REQUIRED IN CONTRACT DOCUMENTS.
2. CURB REVEAL FOR HEADER CURB AT DRIVEWAY APRONS IS 1½ INCHES, AT SIDEWALK ACCESS RAMPS 0 INCHES.
3. HEADER CURB USED FOR SIDEWALK ACCESS RAMPS IS NOT TO BE ROUNDED.

CITY OF ROCHESTER	
STONE CURB	
ISSUED 9-2-91	STANDARD
REVISED 12-30-11	DWG.NO.R609-1