


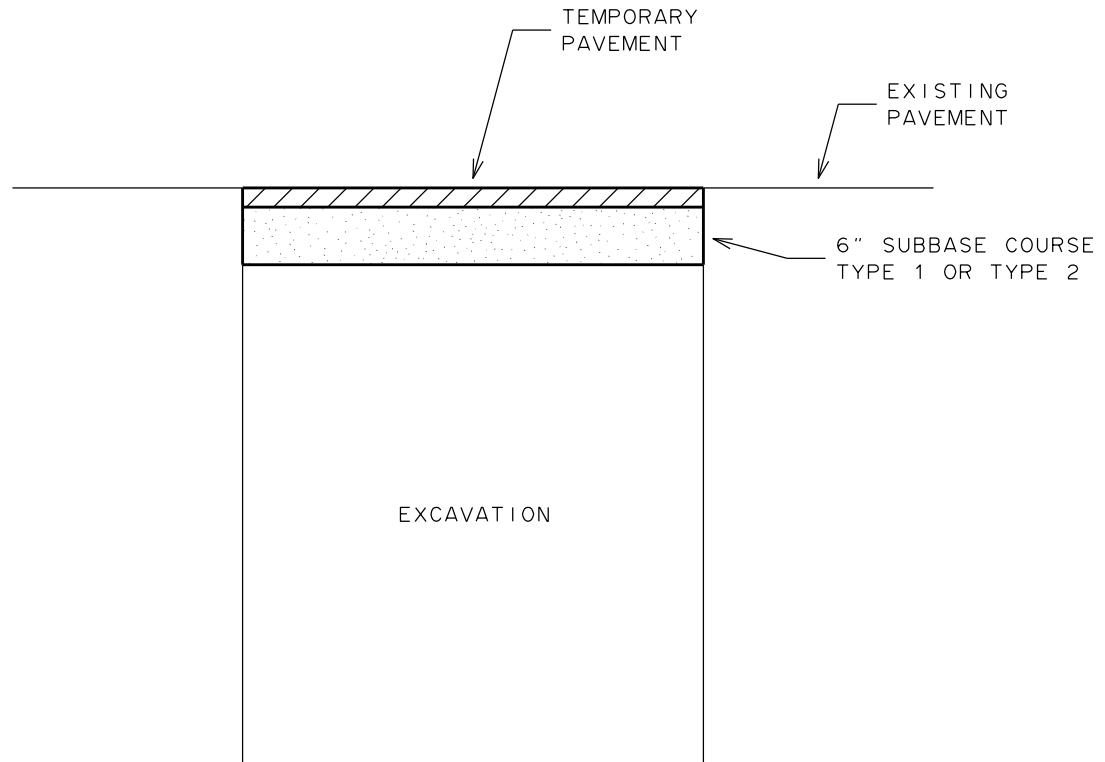

NOTES:

1. TEMPORARY PAVEMENT MATERIAL IS TO BE 2 INCHES TYPE 19 F9 BINDER COURSE HMA 80 SERIES COMPACTION, OR RECYCLED ASPHALT. ASPHALT COLD PATCH AND UNTREATED MILLING MATERIALS ARE NOT ACCEPTABLE FOR USE AS TEMPORARY PAVEMENT.
2. DURING WINTER SEASON (NOVEMBER 1 THRU APRIL 14), IF HMA MATERIAL IS NOT AVAILABLE, USE CLASS F CONCRETE FOR TEMPORARY PAVEMENT. CONCRETE IS TO BE 4 INCHES THICK FOR ARTERIAL AND COLLECTOR STREETS, AND 3 INCHES THICK FOR RESIDENTIAL STREETS AND ALLEYS, AND IS TO BE BROOM FINISHED.
3. TEMPORARY PAVEMENT IS TO BE PLACED WITHIN 24 HOURS OF BACKFILLING EXCAVATION.
4. TEMPORARY PAVEMENT MATERIAL IS TO BE COMPACTED TO PROVIDE FIRM AND SMOOTH SURFACE.

CITY OF ROCHESTER

TEMPORARY PAVEMENT

ISSUED 9-2-91

REVISED 7-31-12

STANDARD
DWG.NO.R412-I