



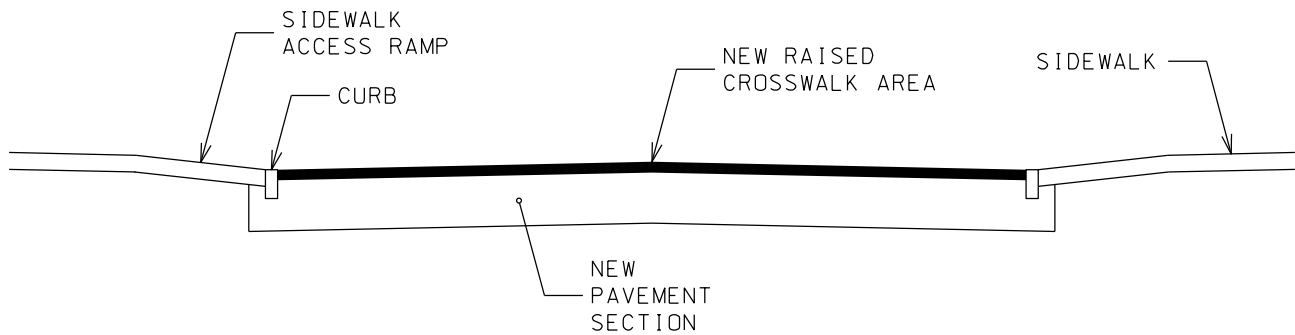

SECTION A-A

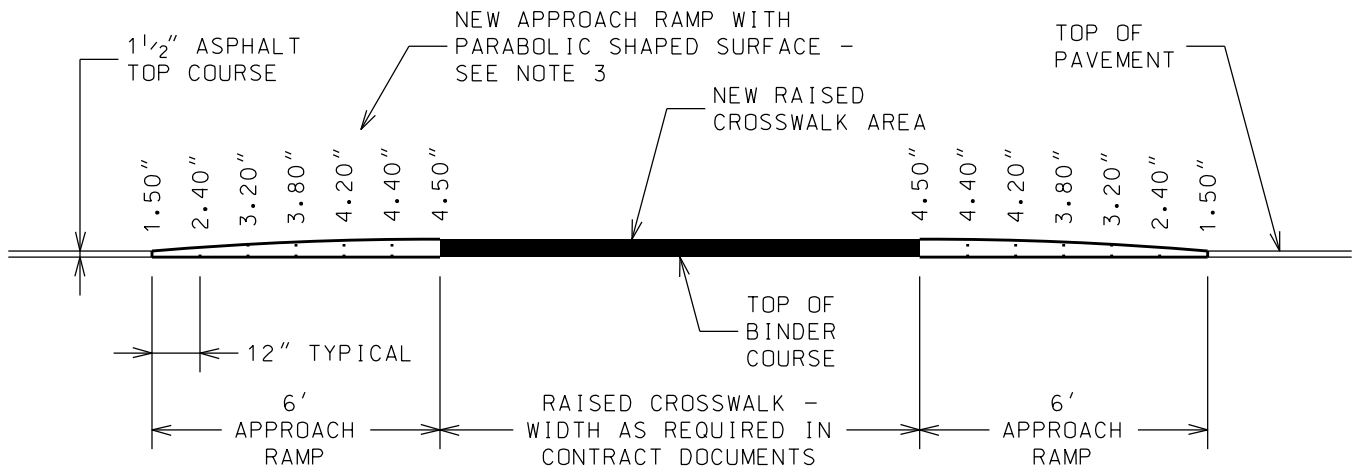

SECTION B-B

NOTES:

1. RAISED CROSSWALK CONSISTS OF HMA COURSES APPLIED DIRECTLY TO TOP OF ASPHALT BINDER COURSE AT DEPTHS SPECIFIED.
2. TOP OF RAISED CROSSWALK AREA IS TO BE 3 INCHES ABOVE AND PARALLEL WITH FINISHED PAVEMENT SURFACE GRADE AND CROSS-SLOPE. TOP OF APPROACH RAMPS ARE TO BE PARABOLIC IN SHAPE.
3. DEPTHS SPECIFIED FOR FORMING PARABOLIC SHAPE OF APPROACH RAMPS ARE AS MEASURED FROM TOP OF BINDER COURSE TO TOP OF APPROACH RAMPS, AND ASSUMING USING STANDARD 1½ INCH TOP COURSE.
4. PAVE STREET WITH ASPHALT TOP COURSE UP TO OUTER LIMITS OF APPROACH RAMPS, THEN CONSTRUCT RAISED CROSSWALK SECTION.

CITY OF ROCHESTER		
RAISED CROSSWALK SECTIONS - RECONSTRUCTION		
ISSUED	8-2-05	NON-STANDARD DWG.NO.S414-2
REVISED	7-19-11	