



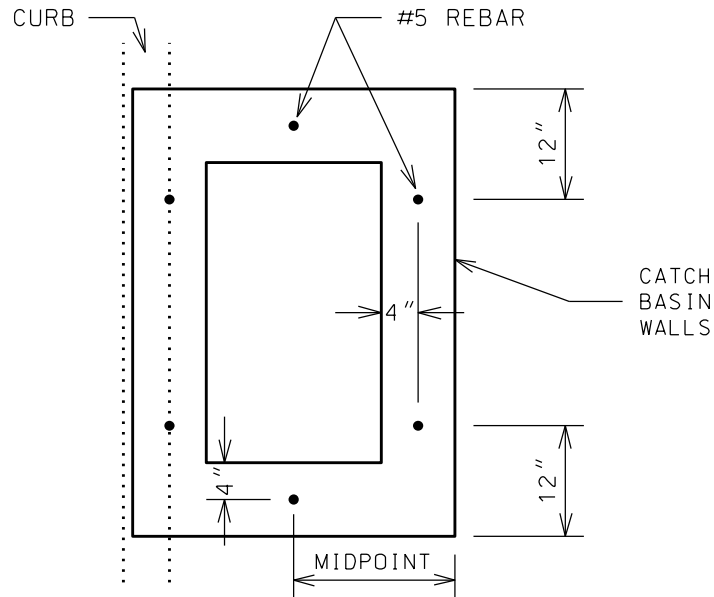

SECTION A-A

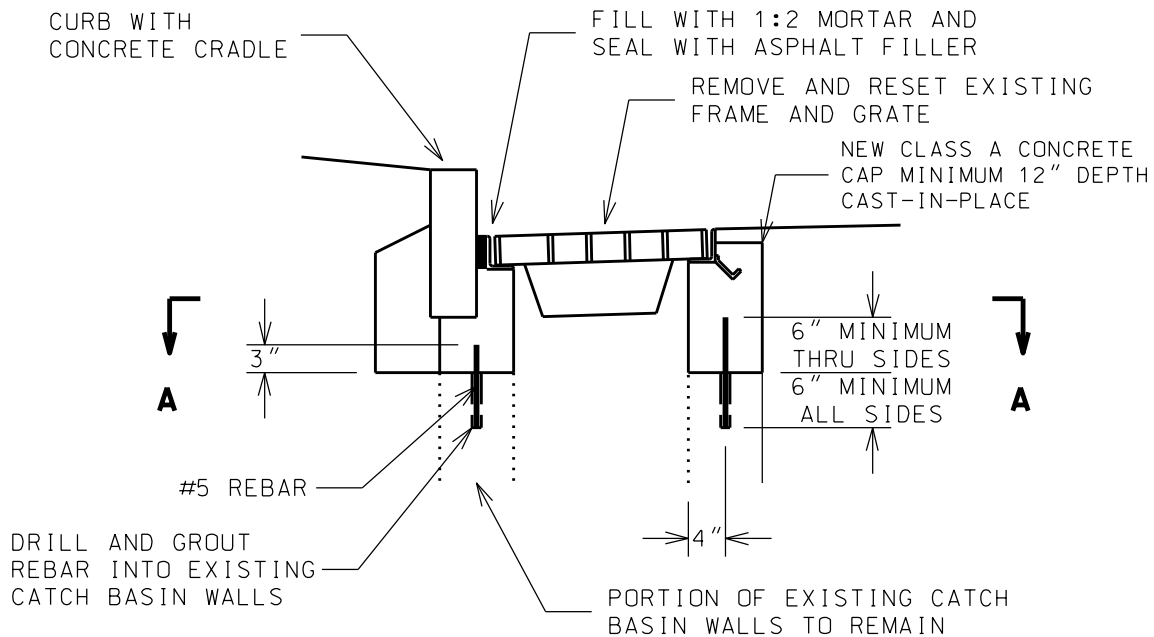

PLAN

NOTES:

1. SCARIFY AND/OR REMOVE TOP PORTION OF EXISTING WALLS TO SUFFICIENT DEPTH TO ACCOMMODATE NEW CAP.
2. USE CONCRETE OR BRICK AND MORTAR TO ADJUST TOP OF WALLS TO SET FRAME AND GRATE TO FINISHED GRADE AND ON SOUND BEARING.
3. COAT INTERIOR AREA OF CATCH BASIN WITH 2 COATS OF TAMMS DURALKOTE 240, OR APPROVED EQUIVALENT.
4. COAT EXPOSED EXTERIOR AREA OF NEW CONCRETE CONSTRUCTION WITH 2 COATS OF HI-BUILD BITUMINOUS COATING 35-J-10, KOPPERS BITMASTIC SUPER SERVICE BLACK, OR APPROVED EQUIVALENT.

CITY OF ROCHESTER

**CATCH BASIN
FRAME AND GRATE
ADJUSTMENT**

ISSUED 10-18-02

REVISED 12-31-07

NON-STANDARD

DWG.NO.S604-7