


FULL SIDEWALK REPLACEMENT

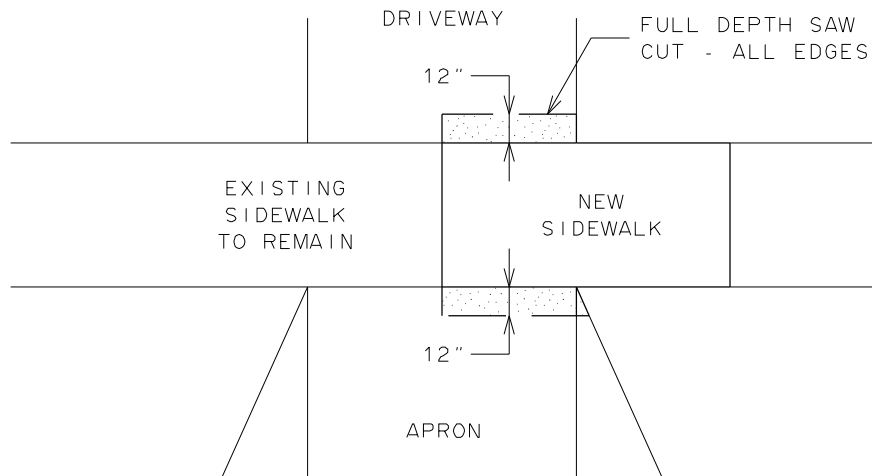

PARTIAL SIDEWALK REPLACEMENT

NOTES:

1. SAW CUTS TO BE MADE USING POWER SAW WITH DIAMOND OR ABRASIVE BLADE AND ARE TO BE STRAIGHT.
2. REMOVE EXISTING PAVEMENT AS REQUIRED AND REPLACE WITH NEW PAVEMENT MATERIALS MATCHING EXISTING.
3. FINISHED SURFACE OF DRIVEWAY TO BE FLUSH WITH ADJACENT SURFACES.
4. JOINTS TO BE SEALED WITH ASPHALT FILLER MEETING NYS DOT MATERIAL DESIGNATION 702-0700.

CITY OF ROCHESTER		
<p>DRIVEWAY RESTORATION AT NEW SIDEWALK</p>		
ISSUED	3-8-94	NON-STANDARD DWG.NO.S608-II
REVISED	7-1-17	