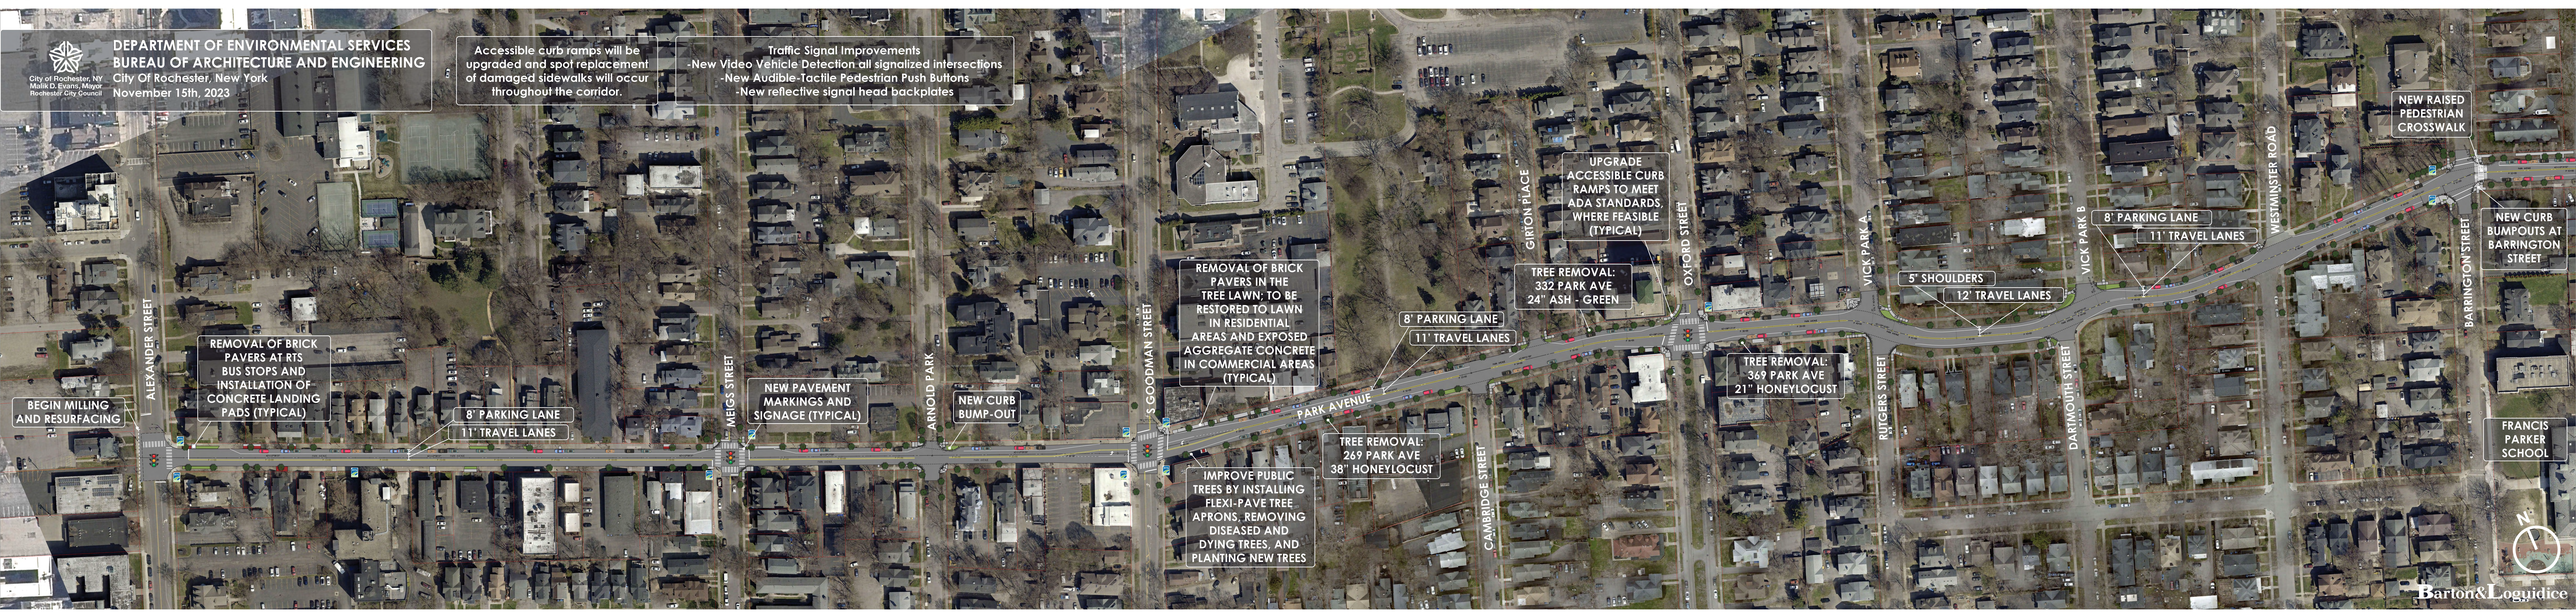
DEPARTMENT OF ENVIRONMENTAL SERVICES
BUREAU OF ARCHITECTURE AND ENGINEERING
City Of Rochester, New York
November 15th, 2023
City of Rochester, NY
Malik D. Evans, Mayor
Rochester City Council
Accessible curb ramps will be upgraded and spot replacement of damaged sidewalks will occur throughout the corridor.
Traffic Signal Improvements
-New Video Vehicle Detection all signalized intersections
-New Audible-Tactile Pedestrian Push Buttons
-New reflective signal head backplates
BEGIN MILLING AND RESURFACING
ALEXANDER STREET
REMOVAL OF BRICK PAVERS AT RTS BUS STOPS AND INSTALLATION OF CONCRETE LANDING PADS (TYPICAL)
8' PARKING LANE
11' TRAVEL LANES
MEIGS STREET
NEW PAVEMENT MARKINGS AND SIGNAGE (TYPICAL)
ARNOLD PARK
NEW CURB BUMP-OUT
S GOODMAN STREET
REMOVAL OF BRICK PAVERS IN THE TREE LAWN: TO BE RESTORED TO LAWN IN RESIDENTIAL AREAS AND EXPOSED AGGREGATE CONCRETE IN COMMERCIAL AREAS (TYPICAL)
IMPROVE PUBLIC TREES BY INSTALLING FLEXI-PAVE TREE APRONS, REMOVING DISEASED AND DYING TREES, AND PLANTING NEW TREES
PARK AVENUE
8' PARKING LANE
11' TRAVEL LANES
TREE REMOVAL: 269 PARK AVE 38" HONEYLOCUST
CAMBRIDGE STREET
GIRTON PLACE
UPGRADE ACCESSIBLE CURB RAMPS TO MEET ADA STANDARDS, WHERE FEASIBLE (TYPICAL)
TREE REMOVAL: 332 PARK AVE 24" ASH - GREEN
OXFORD STREET
TREE REMOVAL: 369 PARK AVE 21" HONEYLOCUST
RUTGERS STREET
VICK PARK A
VICK PARK B
DARTMOUTH STREET
5' SHOULDERS
12' TRAVEL LANES
8' PARKING LANE
11' TRAVEL LANES
WESTMINSTER ROAD
NEW RAISED PEDESTRIAN CROSSWALK
NEW CURB BUMPOUTS AT BARRINGTON STREET
BARRINGTON STREET
FRANCIS PARKER SCHOOL
N
Barton&Loguidice