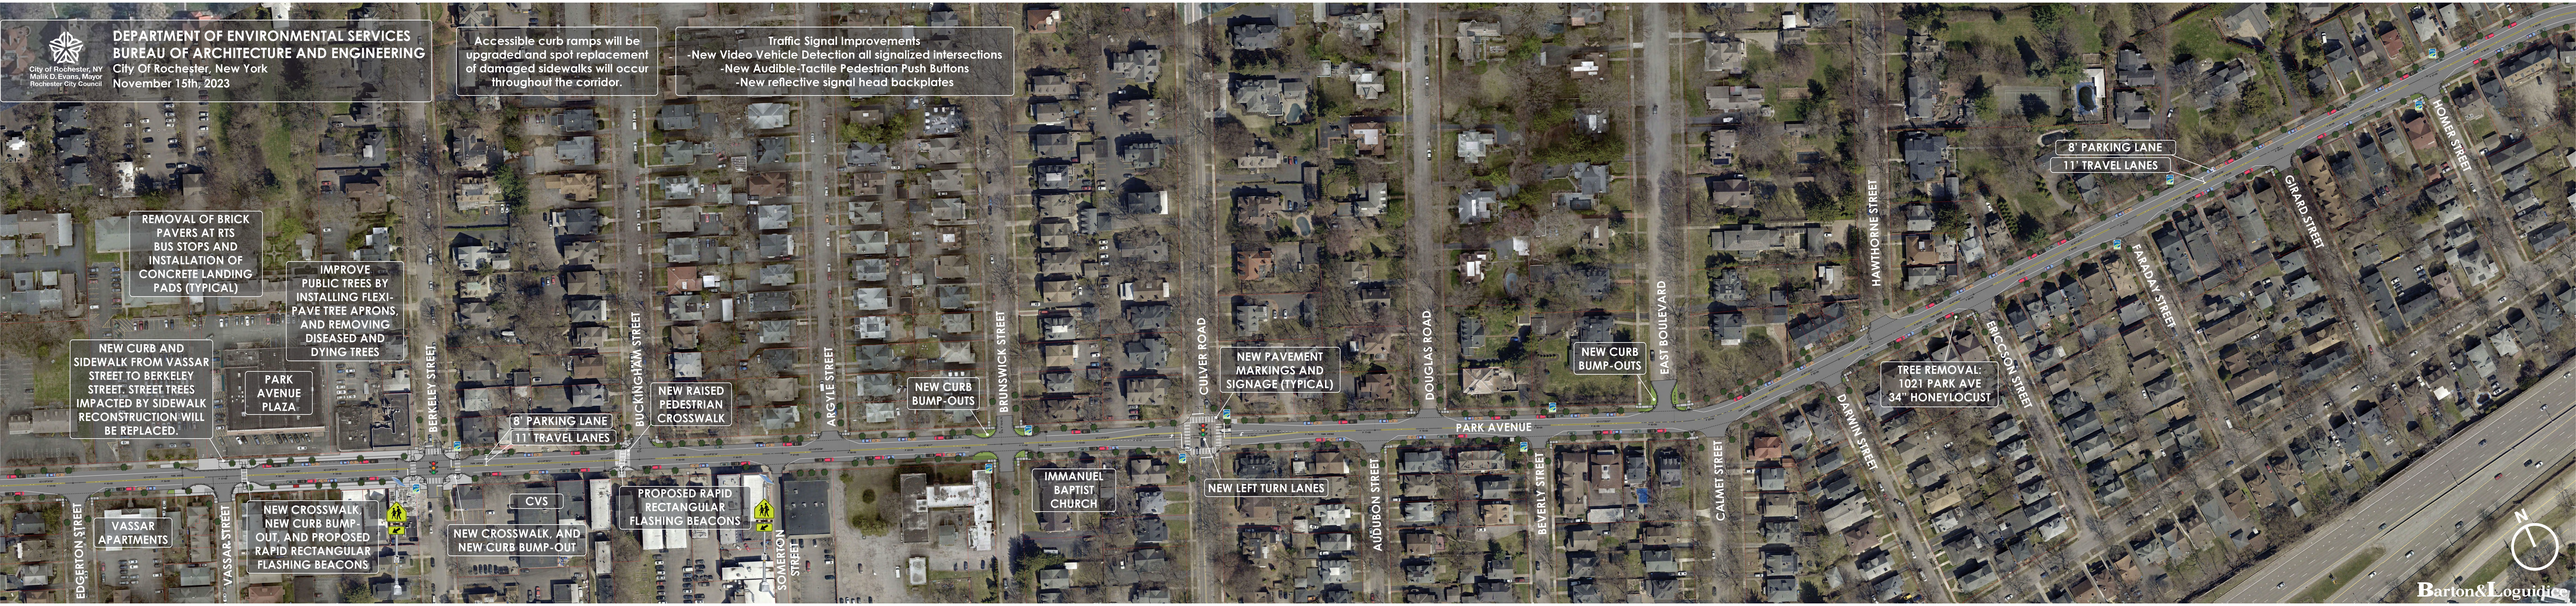
DEPARTMENT OF ENVIRONMENTAL SERVICES
BUREAU OF ARCHITECTURE AND ENGINEERING
City Of Rochester, New York
November 15th, 2023
City of Rochester, NY
Malik D. Evans, Mayor
Rochester City Council
Accessible curb ramps will be upgraded and spot replacement of damaged sidewalks will occur throughout the corridor.
Traffic Signal Improvements
-New Video Vehicle Detection all signalized intersections
-New Audible-Tactile Pedestrian Push Buttons
-New reflective signal head backplates
REMOVAL OF BRICK PAVERS AT RTS BUS STOPS AND INSTALLATION OF CONCRETE LANDING PADS (TYPICAL)
IMPROVE PUBLIC TREES BY INSTALLING FLEXI-PAVE TREE APRONS, AND REMOVING DISEASED AND DYING TREES
NEW CURB AND SIDEWALK FROM VASSAR STREET TO BERKELEY STREET. STREET TREES IMPACTED BY SIDEWALK RECONSTRUCTION WILL BE REPLACED.
PARK AVENUE PLAZA
BERKELEY STREET
8' PARKING LANE
11' TRAVEL LANES
BUCKINGHAM STREET
NEW RAISED PEDESTRIAN CROSSWALK
ARGYLE STREET
NEW CURB BUMP-OUTS
BRUNSWICK STREET
CULVER ROAD
NEW PAVEMENT MARKINGS AND SIGNAGE (TYPICAL)
DOUGLAS ROAD
NEW CURB BUMP-OUTS
EAST BOULEVARD
HAWTHORNE STREET
8' PARKING LANE
11' TRAVEL LANES
GIRARD STREET
HOMER STREET
FARADAY STREET
ERICSSON STREET
TREE REMOVAL:
1021 PARK AVE
34" HONEYLOCUST
DARWIN STREET
PARK AVENUE
EDGERTON STREET
VASSAR APARTMENTS
VASSAR STREET
NEW CROSSWALK, NEW CURB BUMP-OUT, AND PROPOSED RAPID RECTANGULAR FLASHING BEACONS
CVS
NEW CROSSWALK, AND NEW CURB BUMP-OUT
PROPOSED RAPID RECTANGULAR FLASHING BEACONS
SOMERTON STREET
IMMANUEL BAPTIST CHURCH
NEW LEFT TURN LANES
AUDUBON STREET
BEVERLY STREET
CALMET STREET
N
Barton&Loguidice